GE
Lighting Solutions

Decorative Post Top Lighting

StreetDreams™ Vandermore (V)

imagination at work

Product Features

GE offers a variety of decorative Post Top and Pendant Mount Lighting solutions that range from the nostalgic looks of yesterday to the sleek, modern designs of today, providing style and elegance to downtown areas, commercial developments, parks and residential communities.

Applications

- Residential roadway, walkways, historic urban settings, shopping centers, malls, plazas and parks

Housing

- Ornamental cast bases available in four styles

Finish

- Powder painted w/choice of 188 colors

Ratings

- UL/cUL 1598 Listed Suitable for Wet Locations

Unique Features

- Push button tool-less door access to ignitor and PE receptacle
- “Flip” top for quick, tool-less access to lamp
- Multiple finial choices
- Borosilicate glass globe
- Medium and mogul base sockets available
- Full size PE available
- Terminal board available

Ordering Number Logic

StreetDreams™ Vandermore (V)

V _ - _ - _ - _ - __ - _ - _ - _ - _ - _ - _ - _ - _ - __ - _

FAMILY	GLOBE	GLOBE MATERIAL	POD	WATTAGE	LIGHT SOURCE	VOLTAGE	BALLAST TYPE	PE	FINIAL	COLOR	
V = Vandermore	**8** = Octagonal **9** = Octagonal with Spikes	**A** = Asymmetric glass **S** = Symmetric glass	**A** **B** **C** **D** **E** **F** **G** **H**	**05** = 50 **07** = 70 **10** = 100 **15** = 150 **25** = 250	**E** = Energy Act Compliant Pulse MH (EPMH) **S** = HPS **P** = PMH	**0** = Multi **1** = 120 **2** = 280 **3** = 240 **4** = 277 **5** = 480 **D** = 347 **F** = 120X347	**A** = Autoreg **N** = NPF **H** = HPF	**1** = No PE receptacle **2** = PE receptacle **4** = with shorting cap **5** = with PE control	**J** = Gothic **X** = No finial	**0** = None **3** = House-side shield only **9** = Segmented Vandermore reflector for improved optics	**BL** = Black **FG** = Forest Green **DB** = Dark Bronze **XX** = Special order	**B** = Thumb screws on ballast plate for tool-less access **F** = Fusing **T** = Terminal board

Ballast Selection Table

		Ballast Type/ Voltage 60 Hz				
Wattage	Light Source	120X208X 240X277	120	480	120 x 347	347
50	HPS	H,N	H,N	N/A	H,N	N/A
70	HPS	A,H,N	A,H,N	H,N	H,N	H,N
100	HPS	A,H,N	A,H,N	H,N	H,N	H,N
150 (55v)	HPS	A,H,N	A,H,N	H,N	H,N	H,N
250	HPS	A	A	A	A	A
70	PMH	H,N	H,N	H,N	N/A	H,N
100	PMH	H,N	H,N	H,N	H,N	H,N
150	PMH	H*	H,A	N/A	H	H
250	EPM H	A	A	A	N/A	N/A

*MV not available for 150W PMH

Photometric Selection Table

All light sources are clear unless otherwise indicated.

Vandermore		With segmented internal reflector Curve #	
Wattage	Light Source	Symmetric	Asymmetric
70	HPS	453194	453201
100	HPS	453195	453200
150	HPS	453196	453199
250	HPS	453197	453198
70	PMH	453202	453209
100	PMH	453203	453208
250	PMH	453205	453206

Product Dimensions

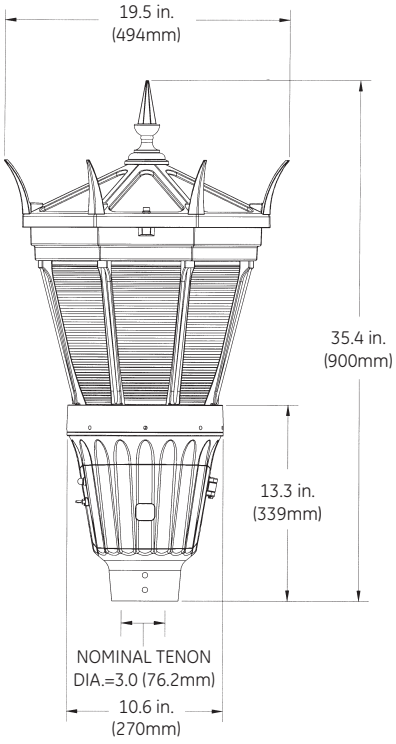

VANDERMORE WITH SPIKES

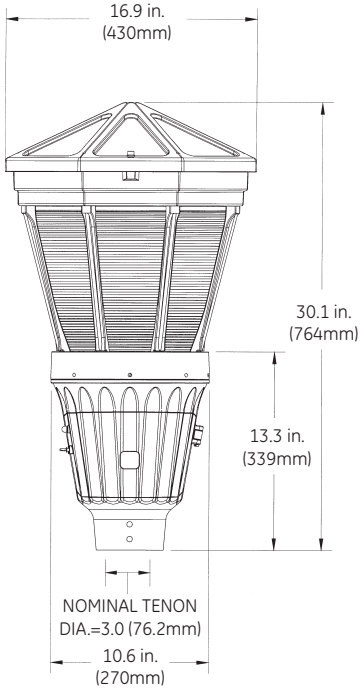

VANDERMORE WITHOUT SPIKES



VANDERMORE POD A
POD E (Push Button)



VANDERMORE POD B
POD F (Push Button)



VANDERMORE POD C
POD G (Push Button)



VANDERMORE POD D
POD H (Push Button)

DATA

- Approximate Net Weight: 60 lbs (28 kgs)
- Suggested Mounting Height: 8-16 ft. (2.5-5 M)
- Effective Projected Area: 1.67 sq ft max (0.155 sq M max)

GE Lighting Solutions • 1-888-MY-GE-LED • www.gelightingsolutions.com
1-888-69-43-533

GE Lighting Solutions, LLC is a subsidiary of the General Electric Company. The GE brand and logo are trademarks of the General Electric Company.
© 2012 GE Lighting Solutions, LLC. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.